

**ISCHEMIC CARDIOPATHY TREATMENT SYSTEM**

Patent Number: JP8089549  
Publication date: 1996-04-09  
Inventor(s): KOIWA YOSHIO; HONDA HIDEYUKI; NAYA TAHEI  
Applicant(s): RES DEV CORP OF JAPAN  
Requested Patent: ☐ JP8089549  
Application Number: JP19940233880 19940928  
Priority Number(s):  
IPC Classification: A61H31/00; A61B8/06; A61B8/08; A61B8/12  
EC Classification:  
Equivalents:

**Abstract**

**PURPOSE:** To more develop means for vibration input from the outside and to put this means into clinical practicability by arranging an attachment section in such a manner that vibrations are inputted from the precordial mold Erb region and increasing a coronary blood flow rate by the vibrations inputted in the diastole by an electrocardiographic trigger.

**CONSTITUTION:** A portable type exciter 20 is composed of an actuator section 22 of a clamping section 21, a vibrating shaft 23 and the attachment section 24. An electric signal is sent by a cord 25 to the actuator section 22, by which the actuator section 22 is operated. The required vibrations are inputted from the attachment section 24 via the vibration shaft 23 into the patient's precordial mold Erb region. An operator is able to make input by holding the clamping section 21 with one hand and lightly pressing, for example, soft silicon rubber to the patient's precordial mold. The input of the vibrations at an arbitrary cardiac time phase is made possible by the electrocardiographic trigger and the arbitrary input with control by an external signal is possible in addition to sinusoidal waves and square waves of respective frequencies. The coronary blood flow rate is thus increased by applying the mechanical vibrations controlled in the cardiac time phase from above the chest wall.

Data supplied from the esp@cenet database - 12

Best Available Copy

(19) 日本国特許庁 (J P)

## (12) 公開特許公報 (A)

(11) 特許出願公開番号

特開平8-89549

(43) 公開日 平成8年(1996)4月9日

(51) IntCl. <sup>9</sup>	識別記号	庁内整理番号	F I	技術表示箇所
A 6 1 H 31/00				
A 6 1 B 9/06		7638-2 J		
9/08		7638-2 J		
8/12		7638-2 J		


審査請求 未請求 請求項の数 2 O L (全 7 頁)

(21) 出願番号	特願平6-233880	(71) 出願人	390014535 新技術事業団 埼玉県川口市本町4丁目1番8号
(22) 出願日	平成6年(1994)9月28日	(72) 発明者	小岩 喜郎 宮城県仙台市青葉区河内三十人町31
特許法第30条第1項適用申請有り 平成6年3月28日～ 3月30日開催の「第58回日本循環器学会総会・学術集 会」において文書をもって発表		(72) 発明者	本田 英行 宮城県仙台市青葉区柏木2-3-17-815
		(72) 発明者	納谷 太平 宮城県仙台市青葉区広瀬町3-31-901
		(74) 代理人	弁理士 西澤 利夫

(54) 【発明の名称】 虚血性心疾患治療システム

## (57) 【要約】

携帯型加振器 (20) からの振動を胸型から入力して虚血性心疾患における冠血流量を増大させる治療システムであって、この携帯型加振器 (20) は把手部 (21) とともに、電気信号によって作動するアクチュエータ部 (22) と、これに接続する振動軸 (23) 並びに振動軸先端のアタッチメント部 (24) とを備え、アタッチメント部 (24) は、前胸型エルブ領域から振動入力されるべく配置され、心電図トリガーにより拡張期に振動が入力されて冠血流量を増大させる。患者の苦痛をとまなうことなく、簡便に、臨床的に、虚血性心疾患に対してその治療システムとして、極めて有効な手段となる。

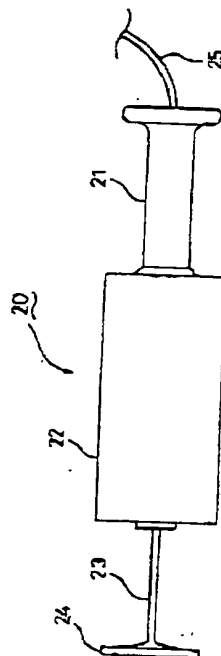

Best Available Copy

(2)

特開平8-89549

## 【特許請求の範囲】

【請求項1】 携帯型加振器からの振動を胸型から入力して虚血性心疾患における冠血流量を増大させる治療システムであって、この加振器は把手部とともに電気信号によって作動するアクチュエータ部と、これに接続する振動軸並びに振動軸先端のアタッチメント部とを備え、アタッチメント部は、前胸型エルブ領域から振動入力されるべく配置され、心電図トリガーにより拡張期に振動が入力されて冠血流量を増大させることを特徴とする虚血性心疾患治療システム。

【請求項2】 請求項1のシステムにおいて、経食道バルスドプラーにより冠動脈血流速度を測定し、この測定に基づいて振動入力を制御することを特徴とする虚血性心疾患治療システム。

## 【発明の詳細な説明】

【0001】

【産業上の利用分野】 この発明は、虚血性心疾患治療システムに関するものである。さらに詳しくは、この発明は、虚血性心疾患を簡便に、かつ患者の苦痛をともなうことなく、冠血流量を増大させることのできる、新しい虚血性心疾患治療システムに関するものである。

【0002】

【従来の技術とその課題】 従来から、虚血性心疾患症、肥大症心筋症、および、大動脈弁閉鎖不全症などの心不全が、病死の要因として依然と高い比率を占めていることは、周知の通りであり、医学、および、医療工学の分野において、このような心不全の早期治療方法が研究されつつある。

【0003】 心不全を引き起こす原因疾患のうち、最も数の多い虚血性心疾患について、心筋の繊維化などの他に、正常部と虚血部との収縮の不均一性および、虚血部心筋での左室拡張期におけるクロスブリッジ活性の持続などにより、左室拡張障害を引き起こし、このような左室拡張障害が、冠灌流に対する血管外圧の増大、内外心筋層血流の不均等、および、心筋酸素消費量増大などの影響を引き起こし、心筋虚血を悪化させるという悪循環を形成することが明らかにされてきている。

【0004】 このような虚血性心疾患の心筋状態を考慮して、薬物療法を主とする虚血性心疾患治療方法が、現在まで一般的に行われてきているが、薬物療法による虚血状態の改善には限界があるため、これらと併用可能で、かつ、作用機序の異なる新しい虚血性心疾患治療方法が待ち望まれていた。このような状況において、最近、骨格筋での急速伸張がクロスブリッジ結合を解離せしめるというBuxleyの報告以来、骨格筋、平滑筋、および心筋などのさまざまな筋肉について、機械的振動を入力し、その時の筋収縮力の応答を検討する試みが注目されている。

【0005】 しかしながら、このような機械的振動に対する筋収縮力応答は、各筋肉の摘出標本を用い、入力周

波数、および、入力振幅を変えたときに、どのような影響を与えるかを調べた基礎的な研究がほとんどであり、機械的振動入力を用いて、臨床的に虚血性心疾患の治療に役立てる方法まで発展させようとした試みはほとんどない。

【0006】 そこで、この発明の発明者らは、この振動入力の手法に注目し、心不全用診断治療についての基礎的な技術を検討し、その成果を提案した。例えば図1に示したものが、その成果としての心不全用診断治療装置である。この装置は、50Hz程度の低周波の正弦波信号を発生する発信器(1)、その発信器(1)で発生した連続信号の出カタイミングを制御するコントロール装置(2)、そのコントロール装置(2)の出力を増幅するパワーアンプ(3)、そのパワーアンプ(3)の出力により心臓に機械的振動を入力する加振器(4)、食道内で実際に左室に加えらるる機械的振動の大きさを検出する振動センサー(7)、例えば加振器(4)のシャフトに取り付け、入力機械的振動を検出する振動センサー(5)、大動脈弁パターンを検出する超音波プローブ(6)、実際に左室に加えらるる機械的振動の大きさが一定となるように発信器(1)の出力を制御する振動制御器(8)、心電図をとるための電極(9)、データ処理装置(10)、モニタ装置(11)、血圧測定器(12)、血圧検査装置(13)などからなっている。

【0007】 しかしながら、このような心不全用診断治療装置を用いて、虚血性心疾患を治療する場合、臨床面における技術的手段についての知見が非常に乏しく、より簡便な操作で、患者に苦痛を与えることなく、虚血性心疾患にとって大きな問題である冠血流量を増大させるための方策は見出されておらず、実際には、このような従来の心不全用診断治療装置を用いて虚血性心疾患を治療することは難しいのが実情であった。

【0008】 この発明は、以上の通りの事情に鑑みてなされたものであり、外部からの振動入力的手段をより発展させ、臨床的に実用化することのできる新しい虚血性心疾患治療システムを提供することを目的としている。

【0009】

【課題を解決するための手段】 この発明は、上記の課題を解決するものとして、携帯型加振器からの振動を胸型から入力して虚血性心疾患における冠血流量を増大させる治療システムであって、この携帯型加振器は把手部とともに電気信号によって作動するアクチュエータ部と、これに接続する振動軸並びに振動軸先端のアタッチメント部とを備え、アタッチメント部は、前胸型エルブ領域から振動入力されるべく配置され、心電図トリガーにより拡張期に入力されて冠血流量を増大させることを特徴とする虚血性心疾患治療システムを提供する。

【0010】 また、この発明は、上記システムにおいて、経食道バルスドプラーによって冠動脈血流速度を測定し、この測定に基づいて振動入力を制御することをも

3

その一つの態様としてもいる。

【0011】

【作用】虚血性心疾患においては左室拡張障害が見られ、その左室拡張障害自体が、心筋灌流量を低下させる要因であり、つまり、虚血性心疾患では、虚血と左室拡張障害とが、互いに虚血を悪化させるという悪循環を形成している。そこで、この発明の発明者は、虚血性心疾患患者の胸壁上、または心外膜側から機械的振動を入力し、その時の心室応答と冠血流速度との関係を理論的かつ実験的に検討し、臨床的に実用化することを目的にこの発明を完成した。

【0012】すなわち、この発明は、1)左室拡張期機械的振動入力法による、左室拡張機能の改善と冠血流増大効果を検討し、繊維化などの器質的変化と、クロスブリッジ活性の持続という機能的変化が、これら機械的振動入力時の応答の差から区別され、2)虚血性心疾患においてクロスブリッジ活性持続と繊維化が左室拡張障害上重要な意味を有するとの知見からの、3)虚血性心疾患患者に対するこの機械的振動入力法の臨床応用の検討に基づいている。

【0013】システムの構成としては、基本的には図1に示したものを踏まえているが、臨床応用にとって欠かせない手段として、携帯型加振器を使用している。この携帯型加振器は、患者による個体差に随時機敏に対応し、かつ、治療過程にあっても医師の診断に沿って、その中断、変更が容易であり、しかも患者に苦痛を与えることなく、操作も容易であるという特徴を有している。従って、診療機関における入院時および外来における使用のみならず、自宅あるいは職場等においても使用可能である。

【0014】この携帯型加振器は、上記の通り、把手部とアクチュエータ部と、振動軸とアタッチメント部とを有し、このアタッチメント部は、パッド等を介して、患者の前胸型エルブ領域から振動入力されるべく配置される。そして、この携帯型加振器により、冠血流速度の増大が図られる。この場合、虚血性心疾患に対する臨床上の機動性を確保するために、経食道バルスドブラーにより冠動脈血流速度を測定し、この測定に基づいて振動入力を制御することが望ましい。

【0015】以下、実施例を示し、さらに詳しくこの発明について説明する。

【0016】

【実施例】図2は、この発明のシステムの携帯型加振器(20)を例示したものである。この例では、携帯型加振器(20)は、略円筒形の把手部(21)とアクチュエータ部(22)、振動軸(23)とアタッチメント部(24)とによって構成されている。アクチュエータ部(22)には、コード(25)によって電気信号が送られ、アクチュエータ部(22)が作動する。所要の振動は、振動軸(23)を介して、アタッチメント部(2

(3)

特開平8-89549

4

4)より、患者の前胸型エルブ領域から入力される。振動は、振動軸(23)の前後方向に発生することになる。

【0017】把手部(21)を片手で持ち、たとえば軟質なシリコンカバーを患者の前胸型に軽くあてて入力することができる。心電図トリガーにより任意の心時相で振動の入力が可能で、各周波数の正弦波、矩形波のほか、外部信号による制御で任意の波形の入力も可能である。以上の携帯型加振器を行い、心時相を制御した機械的振動を胸壁上から加えて、冠血流速度の増大を経食道バルスドブラー法を用いた冠血流速度評価により検討した。

【0018】冠動脈性心疾患患者3名(平均年齢59.7歳、男性2名、助成1名)を被験者とした。これらのすべての患者は、胸痛の既往があり、さらに、冠動脈造影により左前枝に狭窄を認めた。一方、これらの患者の対象として、検診で正常であることがわかっている成人9名(平均年齢46.4歳、うち男性7名、女性2名)、についても試験を行った。すなわち、これらの健康な被験者は、高血圧、心疾患、糖尿病、および、高脂血症いずれも認めず、さらに、生化学検査成績も正常であった。

【0019】検査方法は、前処置として、ジアゼパム5mgを筋注し、キシロカインビスカスにより咽頭を麻酔した。測定項目としては、経食道バルスドブラー法により、冠血流速度を測定し、同時に心電図、心音図、および、ネーザルサーミスタによる呼吸曲線をモニターしつつ、随時、右上腕で血圧を測定した。

【0020】携帯型加振器を用いて、振幅2mm、周波数50Hzの正弦波機械的振動を、心電図トリガーにより、左室拡張期に制御し、被験者の前胸型エルブ領域から入力した。このポータブル加振器の利用に関しては、左冠動脈主幹部と前下行枝とを測定部とし、加振前および加振時において、経食道バルスドブラー法により、冠動脈血流速度を同一呼吸時相で比較し評価した。

【0021】図3(A)(B)は、経食道心エコー法による左冠動脈の描出を示したものである。この図3(A)は、Bモード像を示したものであり、図3(B)は左主幹部のバルスドブラー像を示したものである。図3(A)を参照すると、Bモード像においては、大動脈A○自身よりも、その大動脈A○より分岐する左冠動脈手段部LMT、および、左前下行枝LADが明確に描出される。

【0022】また、図3(B)は、上から、冠動脈血流速度波形、呼吸曲線、心音図、および、心電図を示している。図4(A)(B)は、左室後壁および前壁のMモード像を示したものであり、図4(A)は加振前、図4(B)は加振時の壁運動である。この図4(A)(B)から明らかなように、加振前と比べると、加振後は、後壁、および、前壁ともに凹凸の激しい曲線がみられる。

5

が、入力に応じた機械的振動をしていることがわかる。従って、この図4 (A) (B) から、胸壁からの機械的振動が、確実に心臓へ伝達されていることがわかる。

【0023】図5は52歳の健康男性の左主幹部血流速度を示したものであり、図5 (A) は加振前、図5 (B) は加振時の連続記録である。この図5に示したように、各呼吸時相で、これらのグラフを比べると、加振時には明らかに左室拡張期の血流速度が増大していることがわかる。またさらに、図6は、56歳男性患者で、冠動脈造影で35%の狭窄のあった症例において、左主幹部での測定を示したものであり、加振前と、拡張期振動入力時の血流速度を示したものである。この図8に示したように、加振前に比べて、加振時には、血流速度が左室拡張期の機械的振動入力により増大していることがわかる。

(4)

特開平8-89549

6

\*【0024】さらに、加振前と加振時において、この症例における血流速度波形を、図形的に重ね合せ比較した。図7はその結果であり、この図の灰色の部分加振前の血流速度波形、黒の部分加振時の血流速度波形であり、この図7から明らかなように、加振時には左室拡張期早期より血流速度の増大が始まり、左室拡張前半の血流速度が増大する。

【0025】さらに、表1は個々の被験者における測定結果を示したものである。この表に示すように、血圧、および、心拍数は、加振前後で有意な差はなく、さらに、左主幹部の内径計測においても、その値に加振前後において変化はなかった。

【0026】

【表1】

脚壁からの体外振動入力による冠血流量増大																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
⑦		④		⑤		⑥		⑦		⑧		⑩		⑬		⑬		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮		⑮			

(5)

特開平8-89549

【図3】(A)および(B)は、この発明の実施例において、経食道心エコー法による左冠動脈の描出状態図面を示した図面に代わる写真図である。

【図4】(A)および(B)は、この発明の実施例において、左室後壁および前壁のMモード像図面を示した図面に代わる写真図である。

【図5】この発明の実施例において、左主幹部血流速度の状態を示した図である。

【図6】この発明の実施例において、左主幹部血流速度を示した状態図である。

【図7】この発明の実施例において、左主幹部血流速度を示した状態図である。


【図8】この発明の実施例において、冠血流の増大割合を示した比較図である。

【符号の説明】


- 1 発信器
- 2 コントロール装置

- 3 パワーアンプ
- 4 加振器
- 5 振動センサー
- 6 超音波プローブ
- 7 振動センサー
- 8 振動制御器
- 9 電極
- 10 データ処理装置
- 11 モニタ装置
- 12 血圧測定器
- 13 血圧検査装置
- 20 携帯型加振器
- 21 把手部
- 22 アクチュエータ部
- 23 振動軸
- 24 アタッチメント部
- 25 コード

【図2】

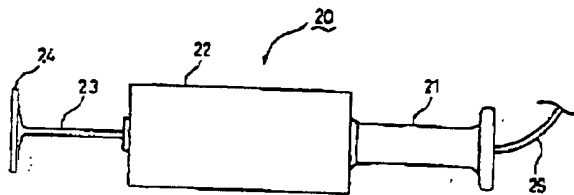

【図3】

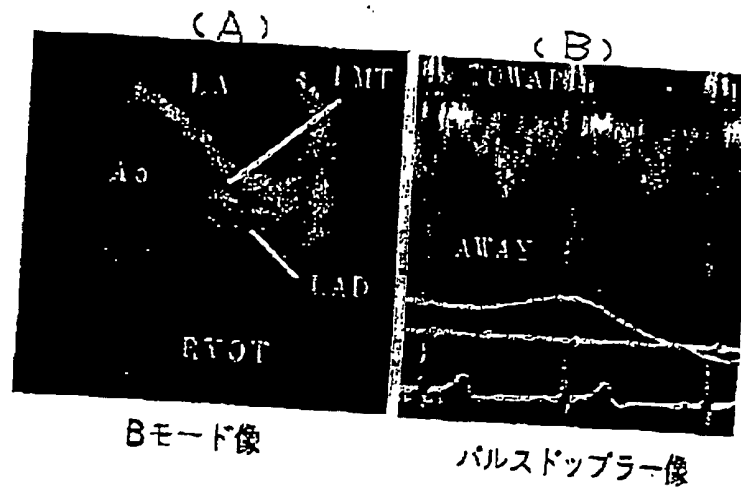

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 08-089549

(43)Date of publication of application : 09.04.1996

(51)Int.Cl.

A61H 31/00

A61B 8/06

A61B 8/08

A61B 8/12

(21)Application number : 06-233880

(71)Applicant : RES DEV CORP OF JAPAN

(22)Date of filing : 28.09.1994


(72)Inventor : KOIWA YOSHIO  
HONDA HIDEYUKI  
NAYA TAHEI

### (54) ISCHEMIC CARDIOPATHY TREATMENT SYSTEM

#### (57)Abstract:

**PURPOSE:** To more develop means for vibration input from the outside and to put this means into clinical practicability by arranging an attachment section in such a manner that vibrations are inputted from the precordial mold Erb region and increasing a coronary blood flow rate by the vibrations inputted in the diastole by an electrocardiographic trigger.

**CONSTITUTION:** A portable type exciter 20 is composed of an actuator section 22 of a clamping section 21, a vibrating shaft 23 and the attachment section 24. An electric signal is sent by a cord 25 to the actuator section 22, by which the actuator section 22 is operated. The required vibrations are inputted from the attachment section 24 via the vibration shaft 23 into the patient's precordial mold Erb region. An operator is able to make input by holding the clamping section 21 with one hand and lightly pressing, for example, soft silicon rubber to the patient's precordial mold. The input of the vibrations at an arbitrary cardiac time phase is made possible by the electrocardiographic trigger and the arbitrary input with control by an external signal is possible in addition to sinusoidal waves and square waves of respective frequencies. The coronary blood flow rate is thus increased by applying the mechanical vibrations controlled in the cardiac time phase from above the chest wall.

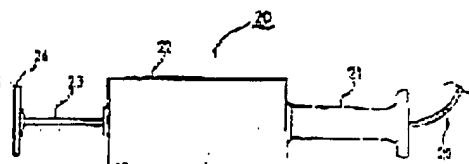

#### LEGAL STATUS

[Date of request for examination] 01.06.1999

[Date of sending the examiner's decision of rejection] 18.06.2002

[Kind of final disposal of application other than

JPO and NCIPI are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

[Claim(s)]

[Claim 1] The actuator section in which it is the therapy system which the vibration from a pocket mold shaker is inputted [ system ] from a breast type, and increases the coronary flow in ischemic heart disease, and this shaker operates with an electrical signal with a bundle hand part, the oscillating shaft list linked to this -- the attachment section at the tip of an oscillating shaft -- having -- the attachment section -- a prothorax -- the ischemic-heart-disease therapy system characterized by being arranged so that an oscillating input may be carried out from a mold Erb area, and for vibration being inputted by the electrocardiogram trigger at diastole, and increasing a coronary flow.

[Claim 2] The ischemic-heart-disease therapy system characterized by passing, measuring a coronary blood flow rate by the esophagus pulse doppler in the system of claim 1, and controlling an oscillating input based on this measurement.

[Translation done.]



\* NOTICES \*

JPO and NCIP are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

DETAILED DESCRIPTION

[Detailed Description of the Invention]

[0001]

[Industrial Application] This invention relates to an ischemic-heart-disease therapy system. This invention relates to the new ischemic-heart-disease therapy system which can increase a coronary flow simple in ischemic heart disease in more detail, without being accompanied by a patient's pain.

[0002]

[Description of the Prior Art] From the former, it is well known that cardiac insufficiency, such as an ischemic heart disease, hypertrophy \*\*\*\*\*, and an aortic insufficiency, occupies the ratio still high as a factor of a death due to sickness, and the early treatment approach of such cardiac insufficiency is being studied in the field of medicine and medical engineering.

[0003] To others, such as fibrosis of a myocardium, about the most numerous ischemic heart disease among the cause diseases which cause cardiac insufficiency by continuation of the cross-bridge activity in the left ventricle diastole in the heterogeneity and the ischemia section myocardium of contraction etc. [ section / the normal section and / ischemia ] A left ventricle escape failure is caused, such a left ventricle escape failure causes the effect of increase of the blood vessel external pressure to coronary perfusion, the inequality of an inside-and-outside myocardium blood flow, myocardium oxygen-demand increase, etc., and it has been shown clearly that vicious circle of worsening myocardial ischemia is formed.

X [0004] Although the ischemic-heart-disease therapy approach which is mainly concerned with pharmacotherapy had generally been performed to current in consideration of the myocardium condition of such ischemic heart disease, since there was a limitation in an improvement of the ischemia condition by pharmacotherapy, these and concomitant use were possible and it waited eagerly for the new ischemic-heart-disease therapy approach that action mechanisms differ. In such a situation, the attempt which inputs mechanical oscillation and considers the response of the muscle contraction force at that time about various muscles, such as skeletal muscle, a smooth muscle, and a myocardium, has attracted attention since the report of Huxley of the rapid expansion by skeletal muscle making cross-bridge association dissociate recently.

[0005] However, the fundamental research which investigated what kind of effect the muscle contraction force response to such mechanical oscillation would have when an input frequency and the input amplitude are changed using the extraction sample of each muscles is most, and there is almost no attempt which it was going to develop to the approach of using for the therapy of ischemic heart disease clinically using a mechanical oscillation input.

[0006] Then, paying attention to the technique of this oscillating input, the artificers of this invention examined the fundamental technique about the diagnostic therapy for cardiac insufficiency, and proposed that result. For example, it is the diagnostic therapeutic device for cardiac insufficiency as the result which was shown in drawing 1. The transmitter with which this equipment generates the sinusoidal signal of about 50Hz low frequency (1), The control apparatus which controls the output timing of the continuous ringing generated with the transmitter (1) (2), The power amplification which

## JP.08-089549,A [DETAILED DESCRIPTION]

Page 2 of 5

amplifies the output of the control apparatus (2) (3). The shaker which inputs mechanical oscillation into the heart with the output of the power amplification (3) (4). The sway sensor which detects the magnitude of the mechanical oscillation actually added to the left ventricle within an esophagus (7). For example, the sway sensor which attaches in the shaft of a shaker (4) and detects input mechanical oscillation (5). Ultrasonic BUROBU (6) which detects an aortic valve pattern, the oscillating controller which controls the output of a transmitter (1) so that the magnitude of the mechanical oscillation actually added to the left ventricle becomes fixed (8). It consists of the electrode (9) for taking an electrocardiogram, a data processor (10), a monitoring device (11), a blood-pressure-measurement machine (12), blood-pressure test equipment (13), etc.

[0007] However, when treating ischemic heart disease using such a diagnostic therapeutic device for cardiac insufficiency, the knowledge about the technical means in a clinical aspect was very scarce, and it was difficult for the actual condition for the policy for increasing the coronary flow which is a big problem not to be found out, but to treat ischemic heart disease in fact using such a conventional diagnostic therapeutic device for cardiac insufficiency for ischemic heart disease, without giving a patient pain by simpler actuation.

[0008] This invention is made in view of the situation as above, develops the means of the oscillating input from the outside more, and aims at offering a clinically utilizable new ischemic-heart-disease therapy system.

[0009]

[Means for Solving the Problem] This invention is a therapy system which the vibration from a pocket mold shaker is inputted [ system ] from a breast type, and increases the coronary flow in ischemic heart disease as what solves the above-mentioned technical problem. This pocket mold shaker equips with the attachment section at the tip of an oscillating shaft the actuator section which operates with an electrical signal with a bundle hand part, and the oscillating shaft list linked to this. The attachment section a prothorax -- it is arranged so that an oscillating input may be carried out from a mold Erb area, and the ischemic-heart-disease therapy system characterized by being inputted by the electrocardio section trigger at diastole and increasing a coronary flow is offered.

[0010] Moreover, in the above-mentioned system, it passes through this invention, it measures a \*\*\*\* coronary blood flow rate to an esophagus pulse doppler, and also requires controlling an oscillating input based on this measurement also as that one mode.

[0011]

[Function] A left ventricle escape failure is seen in ischemic heart disease, it is the factor in which the left ventricle escape failure itself reduces a myocardium perfusion rate, that is, the ischemia and a left ventricle escape failure form the vicious circle of worsening the ischemia mutually, in ischemic heart disease. Then, the artificer of this invention inputted mechanical oscillation from an ischemic-heart-disease patient's breast-wall top, or the epicardium side, considered theoretically and experimentally the relation between the ventricle response at that time, and a coronary blood flow rate, and completed this invention for the purpose of putting in practical use clinically.

[0012] This invention examines the improvement and coronary blood flow enhancement effect of left ventricle extension by the 1 left-ventricle diastole mechanical oscillation inputting method. Namely, vessel qualitative shifts, such as fibrosis, Functional change called continuation of cross-bridge activity is distinguished from the difference of the response at the time of these mechanical oscillation input. 2) It is based on the examination of clinical application of this mechanical oscillation inputting method to 3 ischemic-heart-disease patients from knowledge that cross-bridge activity continuation and fibrosis have important semantics on a left ventricle escape failure in ischemic heart disease.

[0013] Although based on what was fundamentally shown in drawing 1 as the structure of a system, the pocket mold shaker is used as an indispensable means for clinical application. Even if this pocket mold shaker corresponds to the individual difference by the patient sharply at any time and it is in a therapy process, it has the description that actuation is also easy, without that interruption and modification being easy and moreover giving a patient pain along with a diagnosis of a medical practitioner. Therefore, also not only in the use in the time of the hospitalization in a medical-examination engine,

and an outpatient department but a house or a station etc., it is usable.

[0014] this pocket mold shaker -- the above-mentioned passage -- a bundle hand part, the actuator section, and an oscillating shaft and the attachment section -- having -- this attachment section -- a pad etc. -- minding -- a patient's prothorax -- it is arranged so that an oscillating input may be carried out from a mold Erb area. And increase of a coronary flow is used with this pocket mold shaker. In this case, in order to secure the mobility on clinical [ to ischemic heart disease ], it is desirable to measure a coronary blood flow rate by the path esophagus pulse doppler, and to control an oscillating input based on this measurement.

[0015] Hereafter, an example is shown and this invention is explained in more detail.

[0016]

[Example] Drawing 2 illustrates the pocket mold shaker (20) of the system of this invention. The pocket mold shaker (20) is constituted from this example by a bundle hand part (21), the actuator section (22), and the oscillating shaft (23) and the attachment section (24) of a cylindrical shape. In code (25), an electrical signal is sent to the actuator section (22), and the actuator section (22) operates in it. a necessary vibration -- an oscillating shaft (23) -- minding -- the attachment section (24) -- a patient's prothorax -- it is inputted from a mold Erb area. Vibration will be generated in the cross direction of an oscillating shaft (23).

[0017] a bundle hand part (21) -- one hand -- having -- for example, elasticity silicone rubber -- a patient's prothorax -- it can hit to a mold lightly and can input into it. The input of vibration [ by the electrocardiogram trigger ] by the cardiac tense of arbitration is possible, and the wave-like input of arbitration is also possible at control according to an external signal besides the sine wave of each frequency, and a square wave. The above pocket mold shaker was performed, it passed through increase of a coronary flow from the breast wall, and the coronary blood flow rate evaluation using the esophagus pulse-doppler method considered the mechanical oscillation which controlled the cardiac tense.

[0018] Coronary artery nature heart disease patient trinomial (59.7 years old of average age, a male binary name, one support) was made into the test subject. All these patients have the past of pectoralgia and accepted a constriction in the left previous line branch by coronarography further. It examined, even if it took the post of nine adults (inside 46.4 years old of average age, seven men, a female binary name) who understand that it is normal by the medical checkup as these patients' object on the other hand. namely, these healthy test subjects -- hypertension, a heart disease, diabetes mellitus, and hyperlipidemia -- neither was accepted but the biochemistry laboratory report was also still normaler.

[0019] As a pretreatment, the inspection approach carried out intramuscular injection of the diazepam 5mg, and anesthetized the pharynx by xylocaine bis-dregs. As a parameter, blood pressure was measured with the right upper arm at any time by the esophagus pulse-doppler method by passing, having measured the coronary blood flow rate and acting to coincidence as the monitor of an electrocardiogram, a phonocardiogram, and the spirogram by the NEZARU thermistor.

[0020] Using the pocket mold shaker, sinusoidal mechanical oscillation with an amplitude [ of 2mm ] and a frequency of 50Hz was controlled by the electrocardiogram trigger at left ventricle diastole, and was inputted from a test subject's anterior chest wall Erb area by it. About use of this portable shaker, a left main trunk and the front ramus descendens were used as the test section, it passed at the time before excitation of excitation, and the coronary blood flow rate was measured and evaluated by the same respiratory tense by the esophagus pulse-doppler method.

[0021] Drawing 3 (A) and (B) show depiction of the left coronary artery by the transesophageal-echocardiography method. This drawing 3 (A) shows a B mode image, and drawing 3 (B) shows the pulse-doppler image of the left chief editor section. Reference of drawing 3 (A) describes clearly the left coronary artery means section LMT which branches from the main artery Ao, and the left anterior descendance LAD from the main artery Ao itself in a B mode image.

[0022] Moreover, drawing 3 (B) shows a coronary blood flow rate wave, the spirogram, the phonocardiogram, and the electrocardiogram from the top. Drawing 4 (A) and (B) show the M-mode image of a posterior wall of left ventricle and a front wall, drawing 4 (A) is before excitation and drawing 4 (B) is the wall motion at the time of excitation. Although a concavo-convex intense curve is

escape failure improves and two ischemic heart disease, and three ischemic heart disease that correction of the heterogeneity of contraction and an improvement of a coronary blood flow speak to coincidence, and effectiveness maintains after a mechanical oscillation termination for a while, and 4 -- it found out that left ventricle expandability could be also clinically improved by the mechanical oscillation input from on a breast wall etc.

X[0029] It suggested that the mechanical oscillation input by the pocket mold shaker showed clinically possibility of increasing a left ventricle diastole coronary flow, in ischemic heart disease, combined also with possibility of making attainment to the ischemia field of drugs easy, and could serve as a very effective means from these results on an ischemic disease patient's therapy. On the other hand in the conventional system illustrated to drawing 1, pain might be given to the patient, and it was not necessarily thoroughgoing as a therapy system.


[0030]

[Effect of the Invention] When limiting to 1 left-ventricle diastole and inputting mechanical oscillation by this invention as explained in detail above In that the time of the improvement effect of a left ventricle escape failure when the degree of a left ventricle escape failure is severer is [ in / a ventriclus-sinister left ventricle escape failure is improved, and / two ischemic heart disease ] more remarkable, and three ischemic heart disease Correction of the heterogeneity of contraction and an improvement of a coronary blood flow were discovered to coincidence, and it was checked that after a mechanical oscillation termination maintains effectiveness for a while.


[0031] This invention by the oscillating input serves as a very effective means as a system which treats an ischemic disease from these things in ischemic heart disease clinically.

[Translation done.]


Drawing selection drawing 1

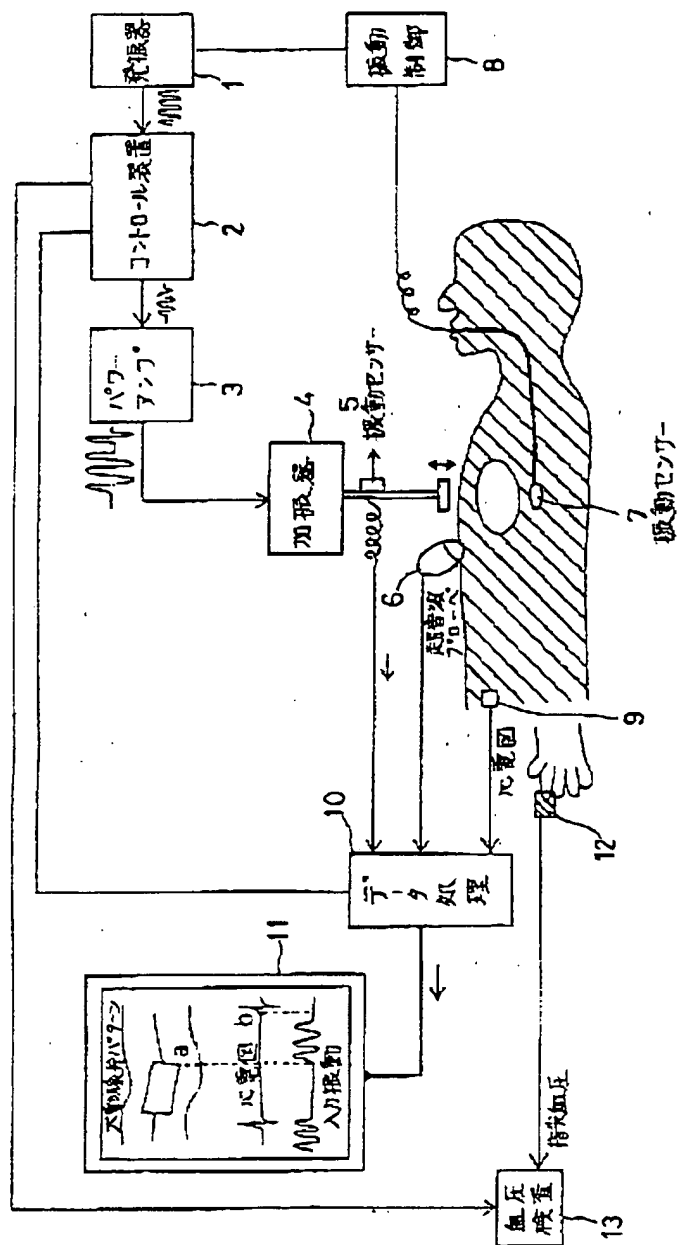


Drawing selection drawing 2

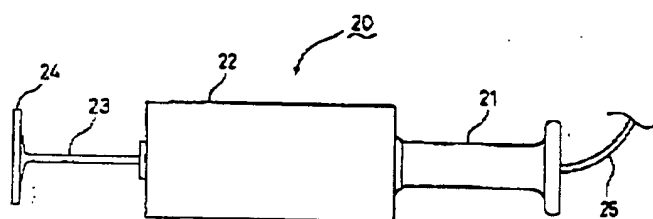

Drawing selection drawing 3

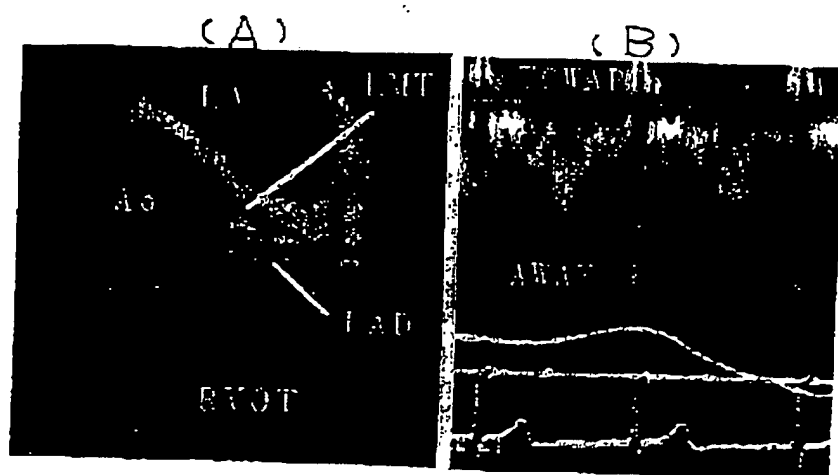


Drawing selection drawing 4

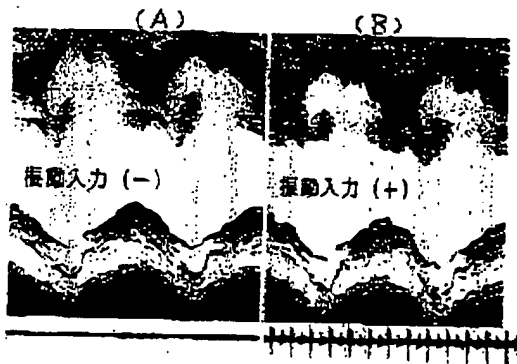




Drawing selection drawing 5

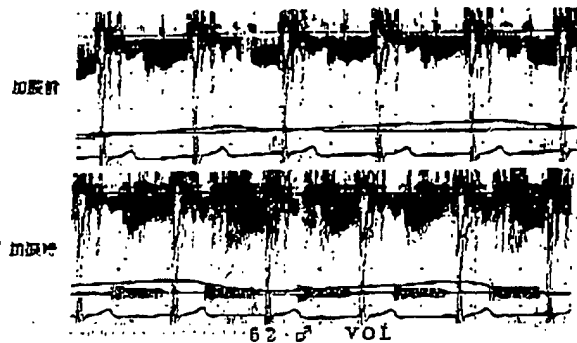

JP. 08-089549. A [Drawing 6]

Page 1 of 1

Drawing selection drawing 6

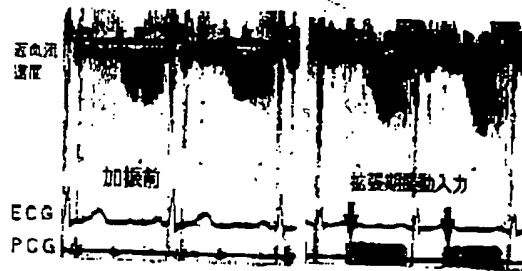


T. K 56歳男性 (CAD 86 35%)

JP, 08-089549, A [Drawing 8]

Page 1 of 1

Drawing selection drawing 8

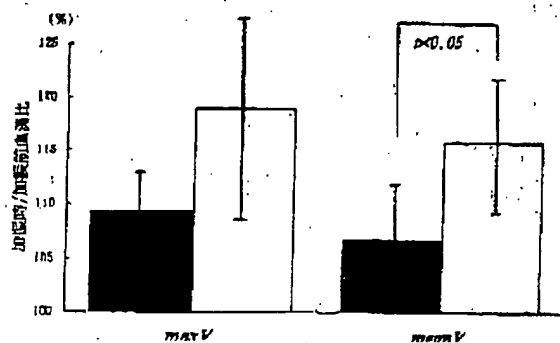

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**